



NORBIT WINGHEAD® i80S-Apogee




Superior Performance Ultra High-Resolution Integrated 3D&4D Medium Range Motion Stabilised Bathymetric System.

Designed to perform in extreme operational environments with high vessel motion, this cylindrical ultra-high resolution curved array bathymetric system, allows for rapid anywhere anytime mobilisation

NORBIT WINGHEAD “S” series sonars are based on a state of the art analogue and digital platform featuring powerful signal processing capabilities, offering active roll and pitch stabilized bathymetry plus several imagery and backscatter outputs as standard ensuring the highest quality survey data performance. With broad R&D expertise, NORBIT has developed - from the ground-up - exciting new technology that allows existing and new applications to benefit from the advantages offered by a compact wideband curved-array multibeam sonar.

The NORBIT WINGHEAD i80S Apogee is a compact ultra-high resolution curved array broadband multibeam sonar designed for use in the most demanding operational environments. Characterised further by a small form factor; low power draw and tight integration, WINGHEAD i80S Apogee installation can occur on surface survey platforms ranging from small USVs to large vessel permanent hull mounts.

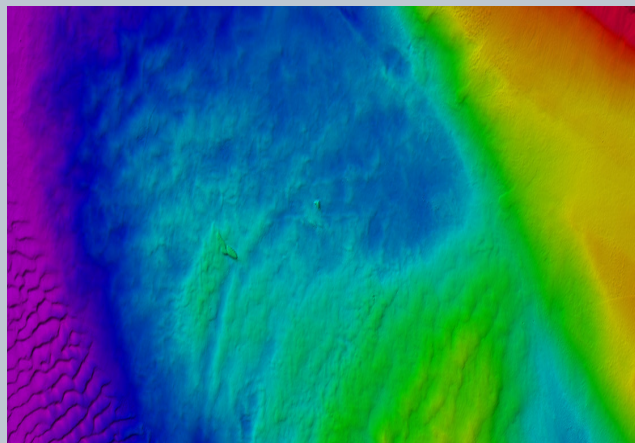



WINGHEAD i80S-Apogee

NORBIT
- explore more -

Features	Options	Applications
<ul style="list-style-type: none"> ✓ Active Roll & Pitch Stabilisation ✓ 80kHz Bandwidth ✓ Backscatter Outputs (Intensity, Sidescan, Snippets, Water Column) ✓ Multidetect ✓ Pipeline Mode ✓ Simple Ethernet Interface ✓ Integrated Sound Velocity Probe ✓ 1024 Dynamically Focused Beams ✓ Mounting Bracket Included ✓ FM & CW Processing ✓ Exceeds IHO Exclusive Order & USACE New Work 	<ul style="list-style-type: none"> ✓ Yaw Stabilisation w. Single Head ✓ Dual Swath w. Single Head ✓ 2048 Dynamically Focused Beams ✓ STX 4D Scanning ✓ Backscattering Strength Output ✓ External Field Replaceable SV AML Probe ✓ Dual Head Configuration ✓ Hull and Pole Mount Options ✓ Supports NORBIT iLiDAR ✓ Can be Delivered with Software Packages e.g. HYPACK, Qinsy, EIVA, BeamworX and Others 	<ul style="list-style-type: none"> ✓ ASV & USV Platforms ✓ Offshore Inspection, Repair and Maintenance (Irm) Operations ✓ Harbour; Quay Wall, Bridge and Structure Engineering Inspection Surveys ✓ Wreck and Seabed Search and Investigation ✓ Pond, River, Lake and Estuary Surveys ✓ Coastal Surveys ✓ Renewable Energy ✓ Mineral and Geological Surveys

TECHNICAL SPECIFICATION

SWATH COVERAGE	5-210° FLEXIBLE SECTOR (SHALLOW WATER IHO SPECIAL ORDER >155°)
RANGE RESOLUTION	<10mm ACOUSTIC w. 80kHz BANDWIDTH
NUMBER OF BEAMS	EA & ED: 256, 512, 1024 (2048 OPTION)
STABILISATION	ROLL, PITCH (YAW OPTION)
OPERATING FREQUENCY	NOMINAL FREQUENCY 400kHz (FREQUENCY AGILITY 200-700kHz)
DEPTH RANGE	0.2m to >300m
PING RATE	UP TO 60Hz, ADAPTIVE
RESOLUTION (ACROSS X ALONG)	STANDARD: 0.5° X 0.9° @400kHz, 0.3° x 0.5° @700kHz
POSITION	HOR: ±(10mm +0.5ppm X DISTANCE FROM RTK STATION, INDEPENDENT OF ANTENNA SEPARATION) VER: ±(15mm +1ppm X DISTANCE FROM RTK STATION, INDEPENDENT OF ANTENNA SEPARATION)
HEADING ACCURACY	0.02° (0.01 PPK) WITH 2m ANTENNA SEPARATION, RTK INDEPENDENT
PITCH/ROLL ACCURACY	0.008 RTK (0.005 PPK), INDEPENDENT OF ANTENNA SEPARATION
HEAVE ACCURACY	2cm OR 2% (DELAYED HEAVE), 5cm OR 5% (REAL TIME)
INTERFACE	ETHERNET
POWER CONSUMPTION	<95W (10-28VDC, 110-240VAC) TOTAL SYSTEM POWER CONSUMPTION
DIMENSIONS	DIMENSIONS WITH BRACKET H: 413mm/16.2", L: 447mm/17.6", W: 159mm/6.25"
WEIGHT	8.5kg (AIR) 4.5kg (WATER) EXCL. BRACKET 8.9kg (AIR) 4.8kg (WATER) INCL. BRACKET
CABLE LENGTH	STD 8m, OPTIONAL: 2m, 25m
OPERATING TEMP.	-4°C to +40°C (TOPSIDE -20°C to +55°C)
STORAGE TEMP.	-20°C to +60°C
ENVIRONMENTAL	TOPSIDE: IP67: DUST TIGHT, PROTECTED AGAINST THE EFFECT OF IMMERSION UP TO 1m WET-END (SONAR): 50m

OUTLINE DRAWING

